


EFD Type 电子变压器 Power transformer

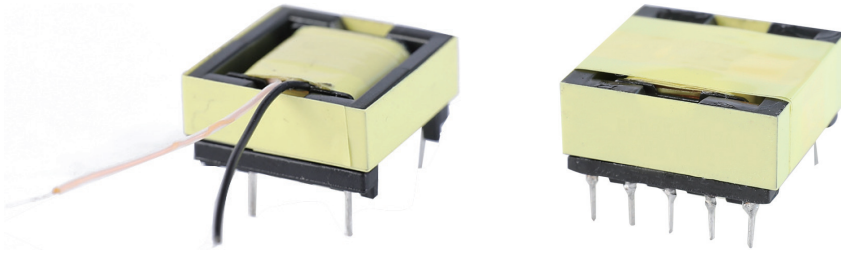

■ 特点 Features

- 工作频率: 1kHz~10MHz
- 工作温度: -20℃~+100℃
- 按客户需求设计定制
- 符合UL和VDE安规要求
- Operation Frequency from 1kHz to 10MHz
- Operating Temperature: -20℃~+100℃
- Can be designed to customer requirements
- Can meet UL and VDE safety requirements

■ 主要用途 Typical Applications

- 适用于功率电源供应器
- 适用于太阳能, 驱动电源, 电脑电视, 网络适配器等
- Designed for power solutions
- Designed for solar inverter, power adapter, PC, LED power, networking etc.

■ 典型规格 Typical Specifications

- 绝缘等级: B/F
- 推荐储存温度: -20℃~+55℃
- Insulation Grade: class B/F
- Recommended Storage Temperature: -20℃~+55℃

型号 Type	功率 Power Capacity (W)		频率 Frequency (Hz)	尺寸 Size (L*W*H) (mm)
	Forward	Flyback		
EFD 12	4.5	3.0	1k-10M	20.5×18.0×8.0
EFD 15	11.0	8.0		21.5×18.0×8.0
EFD 20	25	15		26.0×22.5×10.5
EFD 24.7	65	45		26.0×32.5×15.5
EFD 25	70	50		27.0×27.0×15.0
EFD 30	85	65		32.0×70.0×16.0
EFD 40	150	85		43.0×45.0×24.0
EFD 50	320			57.0×58.0×25.5